ENGINE POWERED TOWING TRACTOR

2TG/2TD

2.0and2.5TON SERIES

The model shown is equipped with optional equipment.

COMPLETE PROFESSIONAL

Advanced TOYOTA technology introduces 2.0 and 2.5 ton series towing tractors. Designed to meet demanding professional needs, the fast traveling speed and small turning radius bring outstanding maneuverability to any worksite.

Complete Operability

Operator's Compartment

Steering wheel with power steering system and adjustable steering column provide excellent maneuverability. Multifunction Display makes it easy to check the vehicle status.

Drawbar Lever & Pin

The operator has a clear view of the drawbar pin from the seat,and can easily operate the drawbar lever.

Seat

This seat supports to reduce fatigue during long hours operation.
A suspension seat is optionally available to help soften the ride even more.

NEW Orange Seat Belt Option

The color of the seat belt will be orange, making it easier to confirm if the seat belt is securely fastened.



Low and Non-slip Floor

The low and non-slip floor supports frequent getting on and off.

Automatic Transmission

The automatic transmission automatically shifts from L to 2 to D, it provides smooth operation.

Steel Cabin OPT

The steel cabin helps to boost both comfort and safety even in extremely cold or rainy climate.

Complete Potential

Powerful 2Z Diesel Engine (42-2TD20.25 models)



Toyota offers its powerful 3.5 liter 2Z diesel engine on 42-2TD20,25 models. It makes heavy work fast and effortless.

Rated Power	Piston Displacement
48.5 kW /2,200rpm	3,469cc
Rated Torque	**Travel Speed**
216 N-m /1,600rpm	30 km/h (No Load) 23 km/h (with 16t Load)

Small Turning Radius

Small turning radius offers comfortable maneuvering even in narrow space.

Turning Radius (Outside)

[02-2TG20,25
02-2TD20,25]
3,050mm

[42-2TD20,25]
3,200mm



TOYOTA

ENGINE POWERED TOWING TRACTOR

2TG/2TD

2.0and2.5TON SERIES

Main Specifications

Model			02-2TG20 02-2TD20 (42-2TD20)	02-2TG25 02-2TD25 (42-2TD25)
Engine Model			4Y 1DZ-Ⅱ,(2Z)	4Y 1DZ-Ⅱ,(2Z)
Maximum Drawbar Pull		kg N	2,000 19,500	2,500 24,500
Gradeability*		% (tan θ)	46	46
Overall Width	A	mm	1,445	1,445
Turning Radius (Outside)	B	mm	3,050 (3,200)	3,050 (3,200)
Overall Height	C	mm	1,390	1,390
Overall Length	D	mm	3,020 (3,130)	3,020 (3,130)

NOTE: *At forward 1st speed. ( ) for 2Z engine model.

Engine Specifications

Model		TOYOTA 4Y Gasoline	TOYOTA 1DZ-Ⅱ Diesel	TOYOTA 2Z Diesel
Piston Displacement	cc	2,237	2,486	3,469
Rated Power/r.p.m	kW JIS ps	39.7/2,400 54/2,400	40.5/2,400 55/2,400	48.5/2,200 66/2,200
Rated Torque/r.p.m	N-m JIS kg-m	162/1,800 16.5/1,800	167/1,600 17/1,600	216/1,600 22/1,600

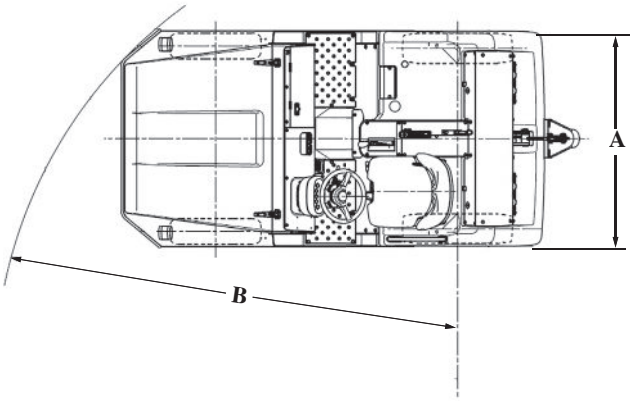

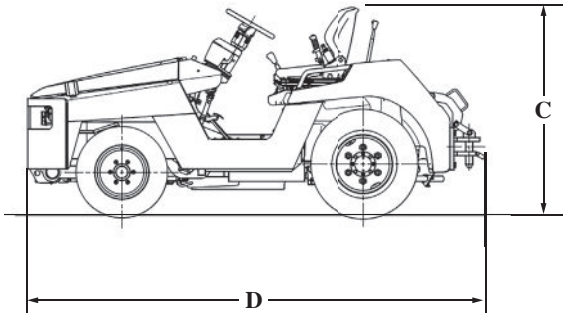

The data in this leaflet is determined based on our standard testing condition.
The performance may vary depending on the actual specification and condition of the vehicle as well as the condition of the operating area.
Availability and specifications depend on market and are subject to change without notice.
Due to photography and printing, color of actual vehicle may vary from this leaflet. Some photos have been computer-enhanced.
Please consult your Toyota representative for details.
Photographs may include optional equipment.

Website YouTube

All rights reserved by Toyota Industries Corporation.

TOYOTA MATERIAL HANDLING

TOYOTA MATERIAL HANDLING INTERNATIONAL

LF.2TG/2TD20.25(TOWING SERIES)/E.2310/Ⓢ/No.710480E0